

DEWALT®

CATALOG

**FALL PROTECTION
DROP PREVENTION**



GUARANTEED TOUGH®

DEWALT

THE HEIGHT OF SAFETY

INDEX

THE NEED FOR FALL PROTECTION IN A TOUGH WORK ENVIRONMENT

OVERVIEW	Inside
A,B,C's OF FALL PROTECTION	Page 2-3
ANCHORAGE	Page 4
CARABINERS	Page 5-11
HARNESSES	Page 12
SELF RETRACTING LIFELINES	Page 13-19
LANYARDS & WORK POSITIONING	Page 20-25
CONFINED SPACE	Page 26-27
VERTICAL & HORIZONTAL LIFELINES	Page 28-31
ROOF TOP SAFETY KITS	Page 32-35
FALL PROTECTION KITS	Page 36-37
DROP PREVENTION	Page 38-39
	Page 40-47


THE NEED FOR HEIGHT SAFETY

Whether you're up on a roof, building a skyscraper or on a scaffolding or a ladder, you need to have confidence in your safety equipment to keep you and others safe and sound.

DEWALT® Fall Protection and Drop Prevention products are built for the toughest work environments and to the highest standards, allowing you to focus on the job at hand and not on your safety equipment.

FALL FROM HEIGHTS IS THE SECOND LEADING UNINTENTIONAL FATAL WORKPLACE EVENT

(Representing 38% of all construction fatalities)

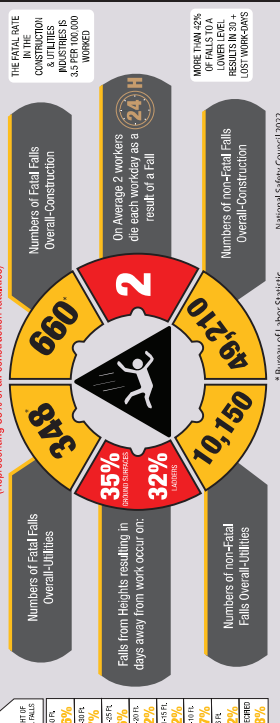

* Bureau of Labor Statistic

National Safety Council 2022

WARNING: Cancer and reproductive harm. - www.P65warnings.ca.gov

GUARANTEED TOUGH.



4

VITAL COMPONENTS FOR A PERSONAL FALL ARREST SYSTEM.

THESE ARE THE ABCD'S OF FALL PROTECTION:

Anchorage - Body Wear - Connecting Device - Descent/Rescue

THIS IS A SECURE POINT OF ATTACHMENT FOR LIFELINES, LANYARDS OR DECELERATION DEVICES




A Anchorage/Anchorage Connector
Anchorage: Commonly referred to as a tie-off point (Example: Rooftop Anchor)
Anchorage Connector: to join the connecting device to the anchorage. (Example: choker-anchor-strap)



B Body Wear: The personal protection equipment worn by the worker. (Example: full-body harness)



C Connecting Device: The critical link which joins the body wear to the anchorage/anchorage connector. (Example: energy absorbing lanyard or self retracting lifeline).

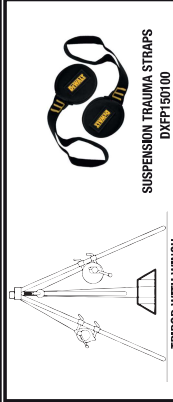

D Descent/Rescue: refers to the rescue plan and products for a fallen worker, which is a critical element of any fall protection program. Suspension Trauma Straps and Winch Systems are often used in the Rescue Plan.

▲ WARNING: EACH COMPONENT MUST BE IN PLACE AND PROPERLY USED TO PROVIDE MAXIMUM WORKER PROTECTION.

▲ ADVERTENCIA: CADA COMPONENTE DEBE ESTAR EN SU LUGAR Y UTILIZARSE CORRECTAMENTE PARA PROPORCIONAR LA MÁXIMA PROTECCIÓN AL TRABAJADOR.

▲ AVERTISSEMENT: CHAQUE COMPOSANT DOIT ÊTRE EN PLACE ET CORRECTEMENT UTILISÉ POUR FOURNIR UNE PROTECTION MAXIMALE DES TRAVAILLEURS.

▲ WARNING: BE SURE TO CALCULATE POTENTIAL FALL DISTANCE WHEN SELECTING CONNECTING COMPONENTS.

▲ ADVERTENCIA: ASEGÚRESE DE CALCULAR LA DISTANCIA POTENCIAL DE CAÍDA AL SELECCIONAR LOS COMPONENTES DE CONEXIÓN.

▲ AVERTISSEMENT: ASSUREZ-VOUS DE CALCULER LA DISTANCE DE CHUTE POTENTIELLE LORS DE LA SÉLECTION DES COMPOSANTS DE CONNEXION.

© 2023 DEWALT Intellectual Tool Co. is a registered trademark of the DEWALT Intellectual Tool Co. used under license. Trademark Licensee: DFP Safety Corp. 20711 14th Ave, Suite 1525 Lakeland, MN 55044 - 1-800-391-4382. A Division of DEWALT Intellectual Tool Co.

www.dpsafety.com

DEWALT**STEEL
ANCHORS****ANCHOR POINT - BOLT DOWN
D-RING - STAINLESS STEEL****DXFP843001**


- Stainless steel Bolt Down D-Ring anchor point provides a strong, reusable and corrosion resistant anchor point for multiple applications.
- Material: Yellow galvanized alloy steel D-ring with polished stainless steel anchor plate
- Length: 4.5 in. (11.4 cm) Weight: 0.90 lbs. (404 gr)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140

**ANCHOR POINT - BOLT DOWN
D-RING - ZINC PLATED STEEL****DXFP843002**

- Zinc plated Bolt Down D-Ring anchor point provides a strong and reusable anchor point for multiple applications.
- Material: Zinc Plated Steel
- Overall Length: 4.5 in. (11.4 cm) Weight: 0.90 lbs. (404 gr)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140

**SINGLE POINT ANCHOR SWIVEL FOR
METAL STRUCTURES****DXFP843102**

- Swiveling Anchor Point for steel provides a strong, reusable and corrosion resistant anchor point for steel applications.
- Material: Steel
- Length: 4.45 in. (11.3 cm) Width: 3 in. (7.62 cm)
- Minimum Breaking Strength: 10,000 lbs. / 44 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140

**ANCHOR POINT - WELD-ON OR BOLT-
ON D-RING - ZINC PLATED STEEL****DXFP844001**

- Single point anchor is designed to be fixed on walls, ceilings, rooftops or steel structures. It can be used to sustain the load impact in all three axis (X, Y & Z)
- Material: Coated Steel
- Overall Height: 14.96 in. (38 cm) Width: 3 in. (7.62 cm)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140

**DEWALT****STEEL
ANCHORS****VERTICAL BEAM ANCHOR****DXFP846021**

- Beam Anchor is designed to clamp vertically to create a fixed anchor point.
- Material: Aluminum Alloy & Alloy Steel
- Minimum Flange Width: 3.93 in. (10 cm)
- Maximum Flange Width: 13.6 in. (34 cm)
- Weight: 6.2 lbs. (2.8 Kg)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017 Type A, OSHA 1926.502, 1910.140

**BEAM ANCHOR - SLIDING
FITS 3.5 in. TO 13.3 in. FLANGE****DXFP846011**

- Sliding Beam Anchor is capable of being installed on the flange of horizontal beams. The variable position jaw adjustment enable it to be installed on Flange widths of 3.5 in. (7.5 cm) to 13.3 in. (34 cm).
- Material: Aluminum Alloy, Brass
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140

**BEAM ANCHOR - MOVABLE TROLLEY
FITS 3.1 in. TO 9.8 in. FLANGE****DXFP846101**

- Beam Trolley Anchor is capable of being installed on the flange of horizontal beams. The variable position jaw adjustment enable it to be installed on flange widths of 3.15 in. (8 cm) to 9.8 in. (25 cm) and high impact rollers provide easy mobility horizontally along a beam.
- Length: 18 in. (45.4 cm) Width: 5.9 in. (15 cm) Height: 5.9 in. (17.1 cm)
- Material: Aluminum Alloy, Stainless Steel
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



DEWALT**WEB & CABLE CHOKERS
ANCHORS****WEB ANCHOR STRAP - CHOKER
LARGE AND SMALL D-RINGS WITH
WEAR PAD**

DXFP8211003	3 ft. (0.9 m)
DXFP8211004	4 ft. (1.2 m)
DXFP8211006	6 ft. (1.8 m)

- Choker style web anchor strap provides a strong, durable and flexible temporary fall protection anchor solution in a compact and lightweight design.
- Material: Polyester, steel
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity OSHA 420 lbs. (191 kg) / ANSI 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140

**CABLE ANCHOR - CHOKER
LARGE AND SMALL O-RINGS**

DXFP821003	3 ft. (0.9 m)
DXFP821004	4 ft. (1.2 m)
DXFP821006	6 ft. (1.8 m)

- Choker style cable anchor strap provides a strong, durable and flexible temporary fall protection anchor solution in a compact and lightweight design.
- Material: 5/16 in. (8 mm) galvanized cable
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140

**DROP THROUGH ANCHOR WITH
CABLE**

DXFP822001	6 ft. (1.8 m)
-------------------	---------------

- Reusable Drop Through Swiveling Cable Anchor.
- 6 in. (15.2 cm) in diameter steel plate
- Designed to be used in either steel or concrete to provide an overhead fall protection anchor point.
- Material: 1/4 in. (6 mm) Galvanized cable with polished steel swivel ring.
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140

**WEB SCAFFOLD CHOKER**

DXFP815002	2 ft. (0.6 m)
-------------------	---------------

- Web scaffold choker provides a secure, safe and extremely portable temporary fall protection anchor point on scaffold pipes or other suitable smaller diameter structural elements.
- Material: Polyester, steel
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140

**DEWALT****CONCRETE
ANCHORS****SINGLE POINT SWIVEL ANCHOR FOR
CONCRETE WITH BOLT****DXFP844031**

- Swiveling Anchor Point for Concrete provides a strong, reusable and corrosion resistant anchor point for post-construction concrete applications.
- Material: High Strength Alloy Steel
- Anchor Length: 4.45 in. (11.3 cm) Width: 3 in. (7.62 cm)
- Bolt Length: 7 in. (17.7 cm)
- Minimum Breaking Strength: 10,000 lbs. / 44 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140
- Includes DEWALT POWER-BOLT®+ Heavy Duty Sleeve Anchor 694SSD-PWR.*


**CONCRETE ANCHOR STRAP D-RING
ONE END AND WEB LOOP OTHER END**

DXFP812003	3 ft. (0.9 m)
DXFP812004	4 ft. (1.2 m)
DXFP812006	6 ft. (1.8 m)

- Concrete web anchor strap with D-ring provides a strong, durable and flexible temporary fall protection anchor point. It is designed to be choked to rebar and embedded into the poured concrete and cut off once construction is complete.
- Material: Polyester Web, Steel
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140

**SINGLE POINT ANCHOR FOR
CONCRETE, WITHOUT BOLT****DXFP843101**

- Swiveling Anchor Point for Concrete provides a strong, reusable and corrosion resistant anchor point for post-construction concrete applications.
- Material: High Strength Alloy Steel
- Length: 4.45 in. (11.3 cm) Width: 3 in. (7.62 cm)
- Minimum Breaking Strength: 10,000 lbs. / 44 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140
- For use with DEWALT POWER-BOLT®+ Heavy Duty Sleeve Anchor 694SSD-PWR or equivalent.*
- * For concrete or a bolt no shorter than 4 in. (100 mm) with a grade 5-8 (or equivalent) with a locking nut and washer must be used for all steel applications.

**REUSABLE CONCRETE ANCHOR****DXFP845101**

- Reusable Concrete Anchor is designed for horizontal, vertical, or overhead concrete applications. The anchor's and expands to secure the anchor in a 3/4 in. (1.9 cm) mounting hole. A spring-tensioned trigger and retractor cables release the anchor with one hand to allow immediate removal and relocation to another hole.
- Material: Galvanized steel .25 in. (0.64 cm)
- Length: 10.96 in. (27.8 cm)
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140

**CONCRETE ANCHOR STRAP
WEB LOOP BOTH ENDS**

DXFP813003	3 ft. (0.9 m)
DXFP813004	4 ft. (1.2 m)
DXFP813006	6 ft. (1.8 m)

- Concrete web anchor strap with web loop provides a strong, durable and flexible temporary fall protection anchor point. It is designed to be choked to rebar and embedded into the poured concrete and cut off once construction is complete.
- Material: Polyester Web, Steel
- Minimum Breaking Strength: 5000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



DEWALT

SPECIALTY ANCHORS

ANCHOR POINT - REUSABLE STEEL GIRDER

DXFP845001

- Steel Girder Anchor is a removable and reusable anchor point to be mounted on solid steel structures, girders and steel I-beams. It can be installed very easily with one hand and is extremely portable. The maximum thickness of the structure on which installation is possible is 1.57 in. (4 cm).
- Material: Alloy Steel, Stainless Steel Molded Polymer
- Length: 4.7 in. (11.4 cm) Weight: 1.21 lbs. (0.55 kg)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017, OSHA 1926.502, 1910.140



CONTAINER ANCHOR POST WITH SWIVEL ANCHORAGE FOR 2 PERSON

DXFP847011

- Container anchor post designed to provide a temporary anchor for working on top of 20 ft. (6 m) & 40 ft. (12 m) container
- Material: Alloy Steel
- Weight: 33 lbs. (15.1 kg)
- Minimum Breaking Strength: 3,600 lbs. / 15 kN
- Max capacity 310 lbs. (140 Kg) each person
- Compliance: ANSI Z359.18-2017 Type D, OSHA 1926.502, 1910.140



PARAPET ANCHOR

DXFP847001

- Parapet anchor with extended movable arm which allows installation on the parapet.
- Material: High strength alloy steel
- Minimum Width Parapet: 2.36 in. (6 cm)
- Maximum Width Parapet: 14.1 in. (36 cm)
- Weight: 21 lbs. (9.5 kg)
- Minimum Breaking Strength: 5,600 lbs. / 25 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017 Type A, OSHA 1926.502, 1910.140



DOOR / WINDOW JAMB ANCHOR

DXFP847021

- Door / Window Jamb Anchor is compressed against the Door or Window frame 'jamming' it self between the two vertical sides.
- Minimum Opening: 23.6 in. (60 cm)
- Maximum Opening: 49.2 in. (125 cm)
- Material: High strength aluminum alloy.
- Weight: 12.5 lbs. (5.67 kg)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017 Type A, OSHA 1926.502, 1910.140

**DEWALT**

ROOFTOP ANCHORS

ROOF ANCHOR - SINGLE USE RAISED - ZINC COATED

DXFP841001

- Single Use, Raised Roof Anchor is designed for use on the ridge of pitched roofs. The anchor is made of coated steel with a 1 in. (2.54 cm) D-Ring style connection point.
- Material: Steel
- Overall Height: 6.38 in. (16.2 cm) Width: 2.23 in. (5.68 cm)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017 Type A, OSHA 1926.502, 1910.140



ROOF ANCHOR - REUSABLE HEAVY DUTY

DXFP846000

- Heavy-Duty Roof Anchor is a lightweight, easy-to-install and reusable anchor point designed for use on various wood and metal rooftop profile. Designed for maximum flexibility, the two (2) steel plates have 6 holes for nailing into wood structure and 6 holes for screws for easy installation. The O-ring can be safely used as anchor point for one user.
- Material: Alloy Steel, Rubber
- Length: 25.2 in. (63.9 cm) Weight: 5.09 lbs. (2.31 kg)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017 Type A, OSHA 1926.502, 1910.140



ROOF ANCHOR - PERMANENT USE

DXFP842002

- The one-piece design and stainless steel provides a long lasting permanent anchor point with D-Rings on each end.
- Material: Stainless Steel
- Overall Length: 18.1 in. (46.1 cm) Width: 1.73 in. (4.40 cm)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017 Type A, OSHA 1926.502, 1910.140



ROOF ANCHOR - SINGLE USE ZINC COATED STEEL

DXFP841002

- Single Use, Raised Roof Anchor is designed for use on the ridge of pitched roofs. The anchor is made of coated steel with a 1 in. (2.54 cm) D-Ring style connection point.
- Material: Steel
- Overall Length: 13.1 in. (33.2 cm) Width: 2.23 in. (5.68 cm)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017 Type A, OSHA 1926.502, 1910.140



REUSABLE - ROOFTOP ANCHOR

DXFP842001

- Reusable Rooftop Anchor is designed for use on wood, steel, and concrete. It works on nearly all roof pitches from flat to sheer. The anchor is made of coated steel for longer lasting product life. The anchor can be installed with either screws or nails (depending on roof pitch).
- Quantity 20 - 16d Nails - 0.165-in. (12 mm) x 3.5 in. (90 mm) (included)
- Quantity 12 - #12 2 1/4 in. (60 mm) Hex Head Screws (included)
- Material: Coated Steel
- Overall Height: 14.96 in. (38 cm) Width: 3 in. (7.62 cm)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017 Type A, OSHA 1926.502, 1910.140



DEWALT**FALL PROTECTION
CARABINERS****CARABINER - STANDARD SELF LOCKING
STEEL 1/4 TURN 1 in. GATE OPENING****DXFP912001**

- Quarter-Turn, Self-Locking, Bulb Style Steel Carabiner provides flexible solutions for connecting various fall protection equipment. With a 1 in. (2.54 cm) gate opening, the 3,600 lbs. (16 kN) gate strength meets OSHA and ANSI standards for fall protection.
- Material: Galvanized Alloy Steel with Golden/Silver Passivation
- Minimum Breaking Strength: 9,000 lbs. / 40 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI 3259.12-2019, OSHA 1926.502, 1910.140

**CARABINER - STANDARD SELF LOCKING
ALUMINUM 1/4 TURN .83 in. GATE OPENING****DXFP915001**

- Quarter-Turn, Self-Locking, Bulb Style Steel Carabiner provides flexible solutions for connecting various fall protection equipment. With a .83 in. (2.1 cm) gate opening, the 3,600 lbs. (16 kN) gate strength meets OSHA and ANSI standards for fall protection.
- Material: High Strength Aluminum Alloy
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI 3259.12-2019, OSHA 1926.502, 1910.140

**CARABINER - STANDARD SELF LOCKING
STEEL 1/4 TURN .85 in. GATE OPENING****DXFP911001**


- Quarter-Turn, Self-Locking, Bulb Style Steel Carabiner provides flexible solutions for connecting various fall protection equipment. With a .85 in. (2.15 cm) gate opening, the 3,600 lbs. (16 kN) gate strength meets OSHA and ANSI standards for fall protection.
- Material: Galvanized Alloy Steel with Golden/Silver Passivation
- Minimum Breaking Strength: 10,000 lbs. / 44 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.12-2019, OSHA 1926.502, 1910.140

**CARABINER - BULB TYPE SELF LOCKING
ALUMINUM 1/4 TURN .67 in. GATE OPENING****DXFP914001**

- Quarter-Turn, Self-Locking, Bulb Style Steel Carabiner provides flexible solutions for connecting various fall protection equipment. With a .67 in. (1.7 cm) gate opening, the 3,600 lbs. (16 kN) gate strength meets OSHA and ANSI standards for fall protection.
- Material: Galvanized Alloy Steel with Golden/Silver Passivation
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.12-2019, OSHA 1926.502, 1910.140

**CARABINER - LARGE SELF LOCKING STEEL
1/4 TURN 2 in. GATE OPENING****DXFP982001**

- Quarter-Turn, Self-Locking, Bulb Style Steel Tower Hook provides flexible solutions for connecting various fall protection equipment on a larger structural members. With a 2 in. (5 cm) gate opening, the 3,600 lbs. (16 kN) gate strength meets OSHA and ANSI standards for fall protection.
- Material: Galvanized Alloy Steel with Golden/Silver Passivation
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity 310 lbs. (140 Kg)
- Compliance: ANSI Z359.12-2019, OSHA 1926.502, 1910.140

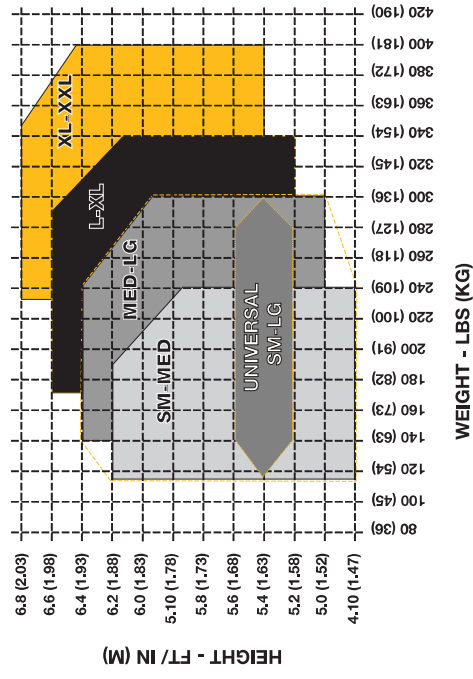
**DEWALT****FALL PROTECTION
HARNESSES****DEWALT****DEWALT Sizing Harnesses****GUARANTEED TOUGH.**

DEWALT

D5000

HARNESSES

The DEWALT® D5000 Comfort Harness is built to perform in tough conditions. Featuring our Air Bridge Support System, Turbo Glide Torso Adjusters, and Tri-Flex Hip Connections, it delivers unmatched mobility, comfort, and fit. This harness distributes weight evenly across the shoulders, reducing fatigue and heat. It's simple to adjust so you can fine-tune your fit without excess webbing, making this one of the easiest harnesses to adjust on the market.

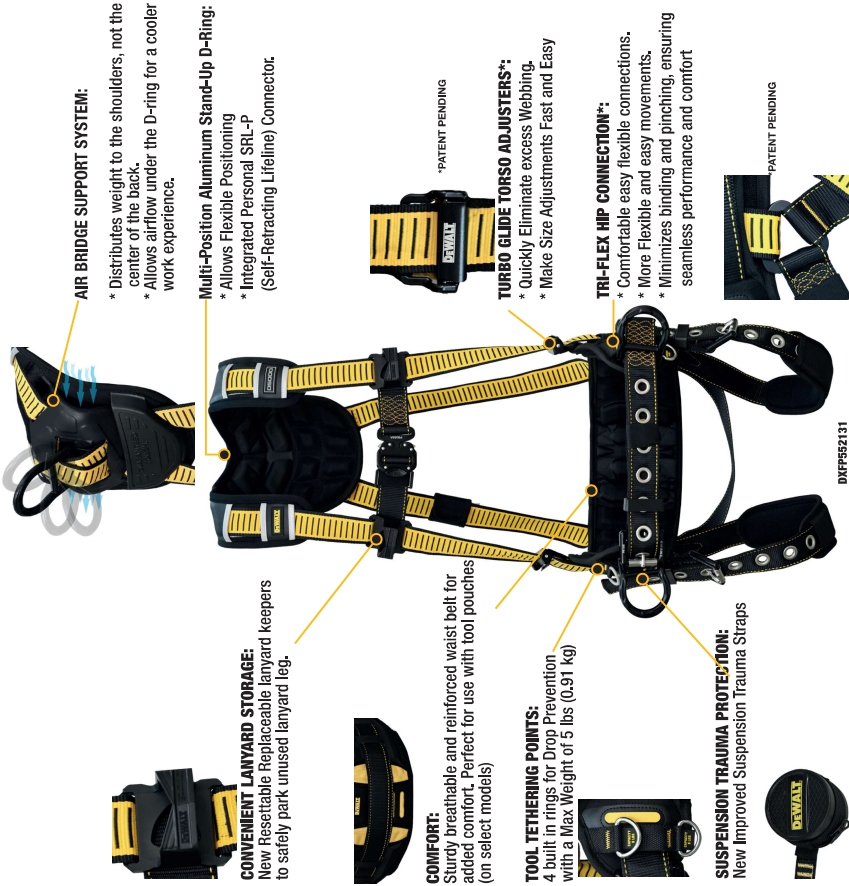

SPECIFICATIONS

WEBBING POLYESTER: 5000 LBS. / 2267 KG MIN. STATIC STRENGTH

BUCKLES AND ADJUSTERS: PLATED ALLOY STEEL

WEIGHT CAPACITY: OSHA 420 LBS. / 191 KG

MEETS ANSI Z359.11-2021, OSHA 1910.140, OSHA 1926.502



D5000

MODELS
& SIZES

DEWALT D5000 Vest-Style Harness		Ordering Part Number				
Chest Connection	Leg Connection	D-Ring Location(s)	S	M	L	XL
Quick Connect	Tongue Buckle	Back, Side, Front, Shoulder	DXF552011-S	DXF552011-M	DXF552011-L	DXF552011-XL
Quick Connect	Quick Connect	Back	DXF552017-S	DXF552017-M	DXF552017-L	DXF552017-XL
Quick Connect	Tongue Buckle	Back, Side (2)	DXF552031-S	DXF552031-M	DXF552031-L	DXF552031-XL
Quick Connect	Quick Connect	Back, Side (2)	DXF552032-S	DXF552032-M	DXF552032-L	DXF552032-XL
Quick Connect	Tongue Buckle	Back, Front	DXF552041-S	DXF552041-M	DXF552041-L	DXF552041-XL
Quick Connect	Quick Connect	Back, Side (2), Front	DXF552042-S	DXF552042-M	DXF552042-L	DXF552042-XL
Quick Connect	Tongue Buckle	Back, Side (2), Front	DXF552051-S	DXF552051-M	DXF552051-L	DXF552051-XL
Quick Connect	Quick Connect	Back, Side (2), Front	DXF552052-S	DXF552052-M	DXF552052-L	DXF552052-XL
Quick Connect	Tongue Buckle	Back, Shoulders (2)	DXF552061-S	DXF552061-M	DXF552061-L	DXF552061-XL
Quick Connect	Quick Connect	Back, Shoulders (2)	DXF552062-S	DXF552062-M	DXF552062-L	DXF552062-XL

Our Vest Style DEWALT D5000 harness comes in a wide range of options for use in general applications, work positioning, climbing and confined space.

DEWALT D5000 Vest-Style Harness, w/Belt		Ordering Part Number				
Chest Connection	Leg Connection	D-Ring Location(s)	S	M	L	XL
Quick Connect	Tongue Buckle	Back, Side, Front, Shoulder	DXF552131-S	DXF552131-M	DXF552131-L	DXF552131-XL
Quick Connect	Quick Connect	Back, Sides (2)	DXF552132-S	DXF552132-M	DXF552132-L	DXF552132-XL
Quick Connect	Tongue Buckle	Back, Side (2), Front	DXF552151-S	DXF552151-M	DXF552151-L	DXF552151-XL
Quick Connect	Quick Connect	Back, Side (2), Front	DXF552152-S	DXF552152-M	DXF552152-L	DXF552152-XL

For those working in tough construction environments, the DEWALT D5000 with waist belt is perfect. With several options ideal for climbing and work positioning, the comfort waist belt provides an excellent option for tool pouches and tool tethering.

DEWALT D5000 Crossover Harness		Ordering Part Number				
Chest Connection	Leg Connection	D-Ring Location(s)	S	M	L	XL
Quick Connect	Tongue Buckle	Back, Front	DXF552021-S	DXF552021-M	DXF552021-L	DXF552021-XL
Quick Connect	Quick Connect	Back, Front	DXF552022-S	DXF552022-M	DXF552022-L	DXF552022-XL
Quick Connect	Tongue Buckle	Back, Sides (2), Front	DXF552023-S	DXF552023-M	DXF552023-L	DXF552023-XL
Quick Connect	Quick Connect	Back, Sides (2), Front	DXF552024-S	DXF552024-M	DXF552024-L	DXF552024-XL

For those that prefer the fit and comfort of a cross-over style harness, the DEWALT D5000 is a great choice. These models come with a front D-ring that make them perfect for ladder climbing applications.

DEWALT

D3000

HARNESSES

DEWALT® D3000 Full Body Harness, designed with features perfect for a wide variety of jobs and working conditions. The D3000 is available in a range of configurations, with and without our comfortable padded waist belt, tongue buckle and quick connect attachment points, integrated trauma straps, repellent webbing, resettable lanyard keepers, and our quick link adapter for fast personal SRL's connection. These are just a few of the key features found in the D3000. Superior design and craftsmanship make this a great harness for your crew.



DURABILITY:
Polyester webbing with
Repellent Coating resists stains
from oil and water.

COMPLIANCE:
Protected label pack keeps
label easily readable during
inspection.



EASE OF INSPECTION:
All DEWALT harnesses come with
a QR code and RFID tag for quick
scan and registration into an
asset management / inspection
system.



SUSPENSION TRAUMA PROTECTION:
All D3000 harnesses include integrated
Suspension Trauma Straps to protect
the user in the event of a fall.

VERSATILITY:

The quick connect SRL adapter
allows for fast installation of your
personal SRL while leaving the
D-Ring free for lanyards and rescue
device connections



CONVENIENT LANYARD STORAGE:
Resettable lanyard keepers
to safely park unused lanyard leg.



VISIBLE FALL DETECTION:
Built in impact indicators show
when a fall has occurred.

COMFORT:

Sturdy breathable waist belt for
added comfort. Perfect for use
with tool pouches

SPECIFICATIONS

WEBBING POLYESTER: 5000 LBS. / 2267 KG MIN. STATIC STRENGTH
BUCKLES AND ADJUSTERS: PLATED ALLOY STEEL
WEIGHT CAPACITY: OSHA 420 LBS. / 191 KG
MEETS ANSI Z359.11-2021, OSHA 1910.140, OSHA 1926.502



16 GUARANTEED TOUGH.®

D3000

MODELS
& SIZES



DXFP32011



DXFP32132



DXFP32021

DEWALT D3000 Vest-Style Harness			Ordering Part Number			
D-Ring Location(s) Back, Side, Front, Shoulder			S - M	M - L	L - XL	XL - 2XL
Chest Connection	Leg Connection					
	Tongue Buckle	Back	DXFP32011 (S-M)	DXFP32011 (M-L)	DXFP32011 (L-XL)	DXFP32011 (XL-2XL)
	Quick Connect	Back	DXFP32012 (S-M)	DXFP32012 (M-L)	DXFP32012 (L-XL)	DXFP32012 (XL-2XL)
	Tongue Buckle	Back, Side (2)	DXFP32031 (S-M)	DXFP32031 (M-L)	DXFP32031 (L-XL)	DXFP32031 (XL-2XL)
	Quick Connect	Back, Side (2)	DXFP32032 (S-M)	DXFP32032 (M-L)	DXFP32032 (L-XL)	DXFP32032 (XL-2XL)
	Tongue Buckle	Back, Front	DXFP32041 (S-M)	DXFP32041 (M-L)	DXFP32041 (L-XL)	DXFP32041 (XL-2XL)
	Quick Connect	Back, Front	DXFP32042 (S-M)	DXFP32042 (M-L)	DXFP32042 (L-XL)	DXFP32042 (XL-2XL)
	Tongue Buckle	Back, Side (2), Front	DXFP32051 (S-M)	DXFP32051 (M-L)	DXFP32051 (L-XL)	DXFP32051 (XL-2XL)
	Quick Connect	Back, Side (2), Front	DXFP32052 (S-M)	DXFP32052 (M-L)	DXFP32052 (L-XL)	DXFP32052 (XL-2XL)
	Tongue Buckle	Back, Shoulders (2)	DXFP32061 (S-M)	DXFP32061 (M-L)	DXFP32061 (L-XL)	DXFP32061 (XL-2XL)
	Quick Connect	Back, Shoulders (2)	DXFP32062 (S-M)	DXFP32062 (M-L)	DXFP32062 (L-XL)	DXFP32062 (XL-2XL)
	Quick Connect	Quick Connect				

Our Vest Style DEWALT D3000 harness comes in a wide range of options for use in general applications, work positioning, climbing and confined space entry.

DEWALT D3000 Vest-Style Harness, w/Belt			Ordering Part Number			
D-Ring Location(s) Back, Side, Front, Shoulder			S - M	M - L	L - XL	XL - 2XL
Chest Connection	Leg Connection					
Quick Connect	Tongue Buckle	Back, Sides (2)	DXFP32131 (S-M)	DXFP32131 (M-L)	DXFP32131 (L-XL)	DXFP32131 (XL-2XL)
Quick Connect	Quick Connect	Back, Sides (2)	DXFP32132 (S-M)	DXFP32132 (M-L)	DXFP32132 (L-XL)	DXFP32132 (XL-2XL)
Quick Connect	Quick Connect	Back, Side (2), Front	DXFP32152 (S-M)	DXFP32152 (M-L)	DXFP32152 (L-XL)	DXFP32152 (XL-2XL)

For those working in tough construction environments, the DEWALT D3000 with waist belt is perfect. We have several options ideal for climbing and work positioning. The comfort waist belt provides an excellent option for work bags and tool tethering.

DEWALT D3000 Crossover Harness			Ordering Part Number			
Chest Connection	Leg Connection	D-Ring Location(s) Back, Side, Front, Shoulder	S - M	M - L	L - XL	XL - 2XL
Quick Connect	Tongue Buckle	Back, Front	DXFP32021 (S-M)	DXFP32021 (M-L)	DXFP32021 (L-XL)	DXFP32021 (XL-2XL)
Quick Connect	Tongue Buckle	Back, Sides (2), Front	DXFP32023 (S-M)	DXFP32023 (M-L)	DXFP32023 (L-XL)	DXFP32023 (XL-2XL)

For those that prefer the fit and comfort of a cross-over style harness, the DEWALT D3000 is a good choice. Both models come with a front D-Ring that make them perfect for ladder climbing applications.

DEWALT

D1000

HARNESSES

DEWALT D1000 Full Body Harness provides an exceptional range of features at an affordable price. The harness has 5 points of adjustment, pass-through chest and tongue buckle leg connections, lanyard keepers, and heavy-duty, repellent polyester webbing. Some models come with a removable shoulder pad included for added comfort.



DURABILITY:
Polyester webbing with
Repellent Coating resists stains
from oil and water.



DXFP512006

COMFORT:

Some models come with a
removable shoulder pad for
added comfort.



CONVENIENT LANYARD STORAGE:

Two lanyard keepers
to safely park unused lanyard leg.



VISIBLE FALL DETECTION:

Built in impact indicators show
when a fall has occurred.



EASE OF INSPECTION:

All DEWALT harnesses come with
a QR code and RFID tag for quick
scan and registration into an
asset management /inspection
system.



SUSPENSION TRAUMA PROTECTION:
Optional suspension trauma straps to
protect the user in the event of a fall.

DXFP150100

SPECIFICATIONS

WEBBING POLYESTER: 5000 LBS. / 2267 KG MIN. STATIC STRENGTH
BUCKLES AND ADJUSTERS: PLATED ALLOY STEEL
WEIGHT RATING: OSHA 420 LBS. / 191 KG
MEETS ANSI Z359.11-2021, OSHA 1910.140, OSHA 1926.502



D1000
**MODELS
& SIZES**



OPTIONAL BACKPAD



DXFP102001

VEST - STYLE HARNESS



DXFP512002



DXFP512001



DEWALT D1000 Vest-Style Harness

Ordering Part Number

Chest Connection	Leg Connection	D-Ring Location(s) Back, Side, Front, Shoulder	S - M	M - L	L - XL	XL - 2XL	UNIVERSAL
Pass-Thru	Pass-Thru	Back	DXFP512001 (S-M)	DXFP512001 (M-L)	DXFP512001 (L-XL)	DXFP512001 (XL-2XL)	DXFP512001
Pass-Thru	Tongue Buckle	Back	DXFP512002 (S-M)	DXFP512002 (M-L)	DXFP512002 (L-XL)	DXFP512002 (XL-2XL)	DXFP512002

VEST - STYLE HARNESS WITH BACK PAD



DXFP512005



DXFP512006



DEWALT D1000 Vest-Style Harness, w/Back Pad

Ordering Part Number

Chest Connection	Leg Connection	D-Ring Location(s) Back, Side, Front, Shoulder	S - M	M - L	L - XL	XL - 2XL
Pass-Thru	Pass-Thru	Back	DXFP512005 (S-M)	DXFP512005 (M-L)	DXFP512005 (L-XL)	DXFP512005 (XL-2XL)
Pass-Thru	Tongue Buckle	Back	DXFP512006 (S-M)	DXFP512006 (M-L)	DXFP512006 (L-XL)	DXFP512006 (XL-2XL)

DEWALT

SRLs



Self Retracting Lifelines

Self-Retracting Lifelines (SRL's) provide users increased safety and versatility over traditional lanyards. With no slack in the lifeline of SRL's, trip hazards and free fall distances are reduced. DEWALT® SRL's provide extreme flexibility with versions that can be mounted overhead, at foot-level and on the users harness in single or twin (100% tie-off) variations.

DEWALT

UNDERSTANDING ANSI Z359.14-2021 SRL STANDARD

On June 17, 2021, ANSI approved the new Z359.14-2021 revision, with updated safety requirements and categorization for Self-Retracting Devices (SRDs). This revision supersedes the previous Z359.14-2014 revision and went into effect on August 1, 2023.

KEY CHANGES IN ANSI Z359.14-2021

- **Types** – SRL-LE removed, SRL-P added
- **New** test weights and specific SRL-P tests added
- **New** label marking requirements by Class
- **Class** – Classes changed from A and B to Class 1 and Class 2 with revised performance requirements. All SRL's must now have class marking on product labels to help ensure the right product is used in the application

CLASS

1

Anchor at or above
dorsal D-ring

CLASS

2

Anchor above or
below dorsal D-ring

Comparison between the old and new standard

ANSI Z359.14-2014 (Old)

Types:

- SRL : Self Retracting Lanyard
- SRL-R – SRL's with integral rescue capability
- SRL-LE – SRL's designed to meet Leading Edge requirements.

Class A:

- Tested overhead w / 282 lbs. (128 kg)
- Must arrest within 24 in. (0.61 m)
- Average Force 1350 lbs. (6 kN)

Class B:

- Tested overhead w / 282 lbs. (128 kg)
- Must arrest within 54 in. (1.37 m)
- Average Force less than 900 lbs. (4 kN)
- Only "LE" models were required to meet Leading Edge requirements

ANSI Z359.14-2021 (New)

SRL Types:

- SRL : Self Retracting Lanyard
- SRL-R – SRL's with integral rescue capability.
- SRL-P – SRL's designed to installed on the user's harness

Class 1:

- Tested overhead w / 310 lbs. (140 kg)
- Must arrest within 42 in. (1.22 m)
- Max Free Fall of 2 ft. (0.61 m)

Class 2:

- Tested Meet Class 1 overhead w / 310 lbs. (140 kg)
- Must arrest fall within 42 in. (1.22 m)
- Average Force less than 1350 lbs. (6 kN)
- Meet Leading edge requirements
- Arrest distance printed on label and instruction
- Max Free Fall of 6 ft. (1.8 m)

STATIC AND DYNAMIC STRENGTH TESTING

- Hold 3000 lbs. (1360 kg) for 1 minute
- Drop test with a 282 lbs. (128 kg) weight
- Specific test for SRL-P did not exist

- Hold 3600 lbs. (1632 kg) for 1 minute
- Drop test with a 310 lbs. (140 kg) weight

Specific Test for SRL-P:

- Dual static to 3600 lbs. (1632 kg)
- Dual connection 1800 lbs. (8 kN) Force
- Abrasion test to 3600 lbs. (1632 kg) after abrasion for Tie-Back models

SRL CLASS 1 PERSONAL

EASY DOCUMENTATION:
All DEWALT SRL's come with an RFID tag for quick scanning and tracking in the DFP Safety Vault™ system.

LIFELINE MATERIAL:
High Strength Dyneema webbing

WORKING LENGTH:
NON TIE-BACK 6 ft. (1.8 m)
TIE-BACK 9 ft. (2.74 m)

SECURE: All connectors are dual action and comply with ANSI Z359.12-2019

DXFP240312-006*
Model amount

Model shown*
000-710

MAX
OSHA CAPACITY
420 lbs
190 kg

ANSI Z.359 14-2021
310 lbs / 140 kg

ANSI Z.359 14-2021
310 lbs / 140 kg

CLASS 1 PERSONAL		HARNESS CONNECTOR		ANCHOR CONNECTOR	
Part Number	PRODUCT DESCRIPTION	STEEL CARABINER	ALUMINUM SNAP HOOK	STEEL SNAP HOOK	ALUMINUM REAR HOOK
DZF24241-006	D100P Personal SRL • Single • Aluminum Carabiner	●			
DZF24231-006	D100P Personal SRL • Single • Aluminum Retainer Hook				●
DZF24221-006	D100P Personal SRL • Single • Steel Snap Hook	●			
DZF24211-006	D100P Personal SRL • Single • Steel Retainer Hook	●			●
DZF24201-006	D100P Personal SRL • Single • Steel Snap Hook	●	●		
DZF24051-009	D100P Personal SRL • Tie-Back • Single • Steel Snaphook	●	●		
DZF24412-006	D100P Personal SRL • Twin • Aluminum Carabiner				
DZF24231-006	D100P Personal SRL • Twin • Aluminum Retainer Hook				●
DZF24212-006	D100P Personal SRL • Twin • Steel Snap Hook	●			
DZF24202-006	D100P Personal SRL • Twin • Steel Retainer Hook	●			●
DZF24052-009	D100P Personal SRL • Tie-Back • Twin • Steel Snaphook	●	●		
DZF24415-009	D100P Personal SRL • Tie-Back • Twin • Steel Snaphook				●

OSHA COMPLIANT
1910.140 AND 192.502
ANSI Z359.14-2021

10

SRL CLASS 2 PERSONAL

FLEXIBILITY: SRL Connector easily mounts through the pre-installed SRL channel on DEWALT D3000 harnesses, leaving the D-Ring accessible for rescue.

TOUGH: High Impact Strength Polymer casing, reinforced corners to ensure structural integrity. Recessed labels for increased product life.

DURABILITY:
The DEWALT Class 2 Performance Energy Absorber cover is made of Thermoplastic polyurethane material, which increases resistance, elasticity, and abrasion and grease resistance. This provides a much more durable cover than other competitive fabrics and absorber covers.

LIFELINE MATERIAL: Galvanized Steel cable 3/16 in. / 4.8 mm
WORKING LENGTH: 8.5 ft. (2.59 m)

COMFORT: Durable, soft rubber handle for sure grip.

SECURE:
All connectors are dual action and
comply with ANSI Z359.12-2019

DXFP270322-008*
Model shown*

MAX
OSHA CAPACITY*
420 lbs
130 kg
ANSI CAPACITY
310 lbs / 140 kg

310 lbs / 140 kg

OSHA COMPLIANT
1910 AND 1926 SUBPART M


ANSI Z359.14-2021

CLASS 2 PERSONAL LEADING EDGE									
Part Number	PRODUCT DESCRIPTION	ALUMINUM CARABINER	STEEL SNAP HOOK	ALUMINUM SNAP HOOK	STEEL REBAR HOOK	ALUMINUM REBAR HOOK	STEEL TIE-BACK HOOK		
SINGLE LEG	DXFPF7242-006	1200P Personal SRL - Leading Edge - Single - Aluminum Carabiner							
	DXFPF7232-008	1200P Personal SRL - Leading Edge - Single - Aluminum Rebar Hook							
	DXFPF7222-008	1200P Personal SRL - Leading Edge - Single - Aluminum Snap Hook							
	DXFPF7032-008	1200P Personal SRL - Leading Edge - Single - Steel Rebar Hook							
	DXFPF7022-008	1200P Personal SRL - Leading Edge - Single - Steel Snaphook							
	DXFPF7042-010	1200P Personal SRL - Leading Edge - Single - Tie-Back, Steel Snaphook							
TWIN LEG	DXFPF7242-008	1200P Personal SRL - Leading Edge - Twin - Aluminum Carabiner							
	DXFPF7232-008	1200P Personal SRL - Leading Edge - Twin - Aluminum Rebar Hook							
	DXFPF7222-008	1200P Personal SRL - Leading Edge - Twin - Aluminum Snap Hook							
	DXFPF7032-008	1200P Personal SRL - Leading Edge - Twin - Steel Rebar Hook							
	DXFPF7022-008	1200P Personal SRL - Leading Edge - Twin - Steel Snaphook							
	DXFPF7062-010	1200P Personal SRL - Leading Edge - Twin - Tie-Back, Steel Snaphook							

DEWALT


SRL CLASS 1

DEWALT® anchor mounted SRL's provide users with a dependable, versatile and rugged fall protection connector for a wide variety of applications.



CONVENIENCE:
*Includes Carabiner and Tag-line.

*Tag-line 20 ft. (6.10 m) and above

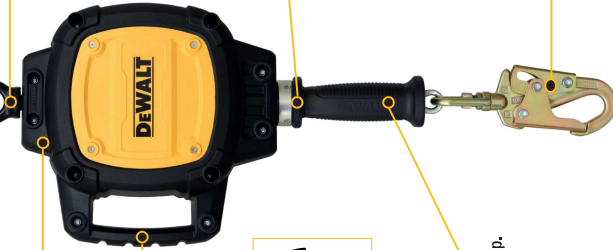

DURABILITY:
High Impact Strength Polymer casing, reinforced corners to ensure structural integrity. Recessed labels for increased product life.


ERGONOMIC:
Large and well-balanced carrying handles for increased ergonomics, even with a gloved hand. (On select Models).



EASY DOCUMENTATION:
All DEWALT SRL's come with an RFID tag for quick scanning and tracking in the DFF Safety Vault system.

COMFORT:
Durable, soft rubber handle for sure grip.

CABLE BRUSH:
Patent pending metal cable guide with wire brush to reduce dirt and debris from entering the housing.



SECURE:
Impact indicating dual action snap hooks comply with ANSI Z359.12-2019

Model shown*

CLASS 1 - SRL'S				
Part Number	PRODUCT DESCRIPTION	ANCHORING METHOD	SNAP HOOK TYPE	RETENTION SRL
DXFP20111-010	1 in. (25.4 mm) Galvanized Web Lanyard			
DXFP20111-011	1 in. (25.4 mm) Standard SRL - Web 11 ft. (3.35 m)			
DXFP20111-012	1 in. (25.4 mm) Standard SRL - Web 20 ft. (6.10 m)			
DXFP20111-020	3/8 in. (9.5 mm) Galvanized Cable Lanyard			
DXFP20111-021	3/8 in. (9.5 mm) Standard SRL - Galvanized Cable - 10 ft. (3.05 m)			
DXFP20111-022	3/8 in. (9.5 mm) Standard SRL - Galvanized Cable - 20 ft. (6.10 m)			
DXFP20111-030	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 10 ft. (3.05 m)			
DXFP20111-031	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 20 ft. (6.10 m)			
DXFP20111-040	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 10 ft. (3.05 m)			
DXFP20111-041	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 20 ft. (6.10 m)			
DXFP20111-050	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 10 ft. (3.05 m)			
DXFP20111-051	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 20 ft. (6.10 m)			
DXFP20111-060	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 10 ft. (3.05 m)			
DXFP20111-061	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 20 ft. (6.10 m)			
DXFP20111-070	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 10 ft. (3.05 m)			
DXFP20111-071	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 20 ft. (6.10 m)			
DXFP20111-080	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 10 ft. (3.05 m)			
DXFP20111-081	1 in. (25.4 mm) Standard SRL - Galvanized Cable - 20 ft. (6.10 m)			


MAX
OSHA CAPACITY
190 kg / 420 lbs
ANSI Z.359.14-2021
310 lbs / 140 kg

OSHA COMPLIANT
190 kg / 420 lbs
ANSI Z.359.14-2021

DEWALT

SRL CLASS 2

DEWALT® line of anchor mounted Class 2, leading edge, SRL's provide users with a dependable, versatile and rugged fall protection connection that can be mounted at foot-level or above.



CONVENIENCE:
*Includes Carabiner and Tag-line.

*Tag-line 20 ft. (6.10 m) and above

VERSATILITY:
Swiveling Captive Eye Structural Anchorage Point 3600 lbs. (16 kN)



CABLE BRUSH:
Patent pending metal cable guide with wire brush to reduce dirt and debris from entering the housing. (18 ft and longer units)

COMFORT:
Durable, soft rubber handle for sure grip.

PROTECTION:
Protected label pack within energy absorber, keeps label safe and easily readable during inspection.

SECURE:
Dual action snap hooks comply with ANSI Z359.12-2019

Model shown*

CLASS 2 - LEADING EDGE - SRL'S	
Part Number	PRODUCT DESCRIPTION
DXFP210221-010	12000 - SRL - Leading Edge - Galvanized Cable - 10 ft. (3.05 m)
DXFP210221-018	12000 - SRL - Leading Edge - Galvanized Cable - 18 ft. (5.49 m)
DXFP210221-025	12000 - SRL - Leading Edge - Galvanized Cable - 25 ft. (7.62 m)
DXFP210221-050	12000 - SRL - Leading Edge - Galvanized Cable - 50 ft. (15.2 m)
DXFP210221-080	12000 - SRL - Leading Edge - Galvanized Cable - 80 ft. (24.3 m)

MAX
OSHA CAPACITY
190 kg / 420 lbs
ANSI Z.359.14-2021
310 lbs / 140 kg

* When anchored at or above dorsal D-Ring.


OSHA COMPLIANT
190 kg / 420 lbs
ANSI Z.359.14-2021

DEWALT

LANYARDS &
WORK POSITIONING

DEWALT® energy absorbing lanyards come in a variety of styles and configurations to fit the requirements of most work situations. Available with internal and external energy absorption, single & twin leg, with steel & aluminum connectors. You're sure to find a model that fits your specific work requirements.

EXTERNAL ENERGY ABSORBING LANYARDS

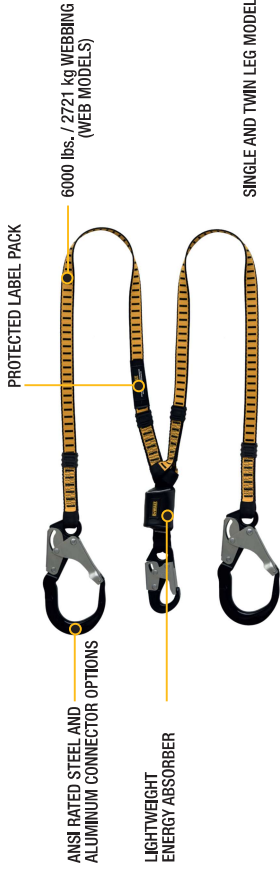

DEWALT 6 Ft. (1.8 m) External Energy Absorber				
Part Number	Legs	Legs Material	Specialty	Anchor End
DXFP611110	Single	Web	General Use	Steel Snap Hook
DXFP611120	Twin	Web	General Use	Steel Snap Hook
DXFP611100	Single	Web	General Use	Steel Snap Hook
DXFP611130	Twin	Web	General Use	Steel Snap Hook
DXFP611150	Single	Web	General Use	Aluminum Rebar Hook
DXFP611530	Twin	Web	General Use	Aluminum Rebar Hook



DXFP611100

DEWALT 6 Ft. (1.8 m) External Energy Absorber - Tie Back				
Part Number	Legs	Legs Material	Specialty	Anchor End
DXFP615110	Single	Web	Tie-Back to Web	Tie-Back Steel Snap Hook
DXFP615111	Single	Web	Tie-Back to D-Ring	Tie-Back Steel Snap Hook
DXFP615120	Twin	Web	Tie-Back to Web	Tie-Back Steel Snap Hook
DXFP615121	Twin	Web	Tie-Back to D-Ring	Tie-Back Steel Snap Hook
DXFP615130	Single	Web	Tie-Back	Aluminum Rebar Hook
DXFP615530	Twin	Web	Tie-Back	Aluminum Rebar Hook



DXFP615110

DEWALT 6 Ft. (1.8 m) External Energy Absorber - Specialty Lanyards				
Part Number	Legs	Legs Material	Specialty	Anchor End
DXFP621120	Single	Web	12 ft. Freefall	Steel Snap Hook
DXFP621130	Twin	Web	12 ft. Freefall	Steel Snap Hook
DXFP626100	Single	Coated Cable	Loading Edge	Steel Snap Hook
DXFP626110	Single	Coated Cable	Loading Edge	Steel Snap Hook




DXFP621100

DEWALT

LANYARDS &
WORK POSITIONING

INTERNAL ENERGY ABSORBING LANYARDS & WORK POSITIONING DEVICES

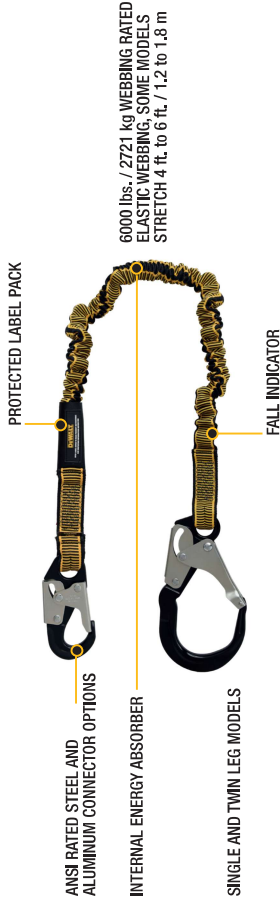

DXFP612110



DXFP613510



DXFP614100



DXFP614150

DXFP103501

DEWALT 6 Ft. (1.8 m) Internal Energy Absorber - Elastic Lanyards				
Part Number	Legs	Legs Material	Specialty	Anchor End
DXFP612110	Single	Web	General Use	Steel Snap Hook
DXFP612111	Single	Web	General Use	Steel Snap Hook
DXFP612120	Twin	Web	General Use	Steel Snap Hook
DXFP612130	Twin	Web	General Use	Steel Snap Hook

DEWALT 6 Ft. (1.8 m) Internal Energy Absorber - Stretch Lanyards (4 ft. to 6 ft.) (1 m to 1.8 m)				
Part Number	Legs	Legs Material	Specialty	Anchor End
DXFP613100	Single	Web	General Use	Steel Snap Hook
DXFP613110	Single	Web	General Use	Steel Snap Hook
DXFP613120	Twin	Web	General Use	Steel Snap Hook
DXFP613130	Twin	Web	General Use	Steel Snap Hook
DXFP613510	Single	Web	General Use	Aluminum Rebar Hook
DXFP613530	Twin	Web	General Use	Aluminum Rebar Hook

DEWALT Working Position Devices				
Part Number	Legs	Legs Material	Specialty	Length
DXFP614100	Twin	Chain	Positioning	2 ft. (0.6 m)
DXFP614110	Single	Web	Positioning	6 ft. (1.8 m)
DXFP614111	Single	Web	Positioning	4 to 6 ft. (1.2 to 1.8 m)
DXFP614150	Twin	Web	Positioning	2 ft. (0.6 m)


DEWALT Accessories				
Part Number	Legs Material	Specialty	Length	Connector End
DXFP103501	Web	Dorsal D-Ring Extender	1.5 Ft. (0.4 m)	Steel Snap Hook
				D-Ring

26 GUARANTEED TOUGH.®

DEWALT

**DAVIT SYSTEM
CONFINED SPACE**

DEWALT® Davit Systems are modular in design to allow the user various fixed and portable bases with 2 mast heights. The cantilevered boom arm has 3 adjustment positions so users can adjust the height as needed.

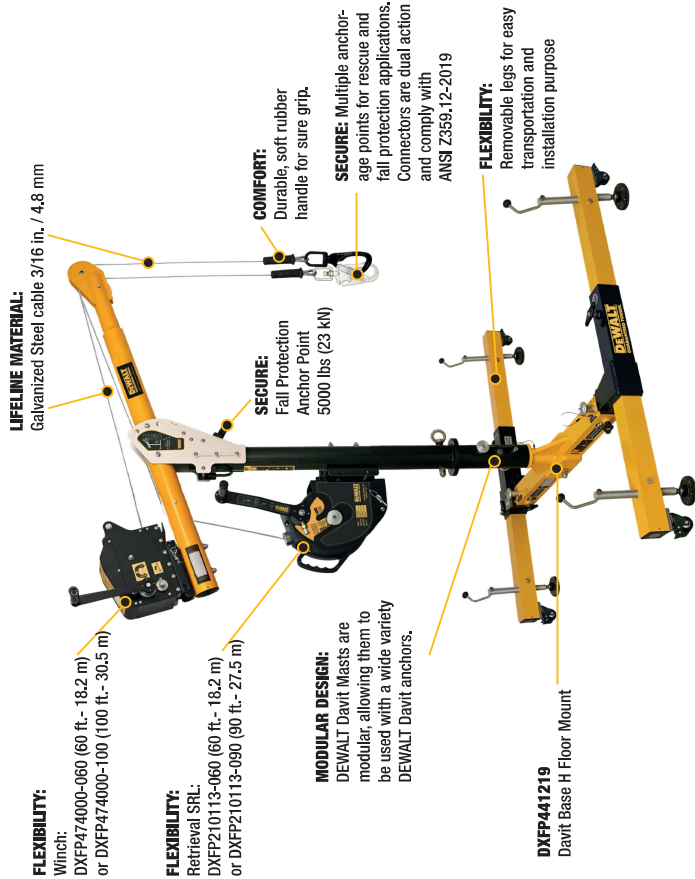

DAVIT SYSTEMS									
Part Number	PRODUCT DESCRIPTION	4 ft. Mast 107" (32.3 m)	6 ft. Mast 139" (41.9 m)	8 ft. Mast 171" (52.1 m)	10 ft. Mast 203" (61.9 m)	12 ft. Mast 235" (71.6 m)	Winch approx. 400-450	Retrieved SRL DWP1111-24	Recommended Model Davit Anchor
DXFP451818-4206	DEWALT 5 Piece Davit System, 36 in. (0.27m) Mast	•	•	•	•	•	•	•	•
DXFP451818-4206	DEWALT 5 Piece Davit System, 36 in. (0.27m) Mast with 60 ft. (18.2 m) Winch	•	•	•	•	•	•	•	•
DXFP451818-4206	DEWALT 5 Piece Davit System, 36 in. (0.27m) Mast with 60 ft. (18.2 m) Winch	•	•	•	•	•	•	•	•
DXFP451818-4206	DEWALT 5 Piece Davit System, 36 in. (0.27m) Mast with 60 ft. (18.2 m) Retrieved SRL	•	•	•	•	•	•	•	•
DXFP451818-4206	DEWALT 5 Piece Davit System, 36 in. (0.27m) Mast with 60 ft. (18.2 m) Retrieved SRL	•	•	•	•	•	•	•	•
DXFP451818-4206	DEWALT 5 Piece Davit System, 36 in. (0.27m) Mast with 60 ft. (18.2 m) Retrieved SRL	•	•	•	•	•	•	•	•
DXFP451818-4206	DEWALT 5 Piece Davit System, 36 in. (0.27m) Mast with 60 ft. (18.2 m) Retrieved SRL	•	•	•	•	•	•	•	•
DXFP451818-4206	DEWALT 5 Piece Davit System, 36 in. (0.27m) Mast with 60 ft. (18.2 m) Retrieved SRL	•	•	•	•	•	•	•	•
DXFP451818-4206	DEWALT 5 Piece Davit System, 36 in. (0.27m) Mast with 60 ft. (18.2 m) Retrieved SRL	•	•	•	•	•	•	•	•

GUARANTEED TOUGH.®

DEWALT

**ACCESSORIES
CONFINED SPACE**

DAVIT BRACKET WINCH OR RETRIEVAL SRL

DXFP460300

- The DEWALT Davit Mounting Bracket is a replacement for the brackets pre-installed on davit masts and booms.
- Material: Alloy Steel



DAVIT REPLACEMENT PIN KIT

DXFP460500

- The DEWALT Davit Replacement Pin Kit provides all of the pins for a DEWALT Davits
- Material: Alloy Steel



CONCRETE ANCHOR

DXFP442213

- DEWALT Davit Concrete Embedded Anchor provides a convenient, flush and permanent anchor point for DEWALT Davit masts for various confined space fall protection and rescue applications.
- Material: High-Strength 316 Stainless Steel
- Weight: 5.75 lbs. (2.6 kg)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity ANSI 310 lbs. (140 Kg) each person
- OSHA 620 lbs. (282 kg) for Rescue
- Compliance: ANSI Z359.18-2017 Type A
- OSHA 1926.502, 1910.140



DAVIT BASE - RECEIVER MOUNT ANCHOR

DXFP444235

- DEWALT Receiver Mount Anchor is designed to fit into 2 in. (51 mm) trailer hitch receiver of any vehicle
- Material: Galvanized Steel
- Weight: 104.9 lbs. (47.5 kg)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity ANSI 310 lbs. (141 kg) - OSHA 620 lbs. (282 kg) for Rescue
- Compliance: ANSI Z359.18-2017 Type A, OSHA 1926.502, 1910.140



DAVIT BASE - BOLT-ON WALL MOUNT


DXFP442221

- DEWALT Davit Bolt-on Wall Mount Anchor provides a convenient, semi-permanent anchor point for DEWALT Davit masts for various confined space fall protection and rescue applications
- Material: High Strength 316 Stainless Steel
- Weight: 23.3 lbs. (10.5 kg)
- Minimum Breaking Strength: 5,000 lbs. / 23 kN
- Max capacity ANSI 310 lbs. (140 Kg) each person
- OSHA 620 lbs. (282 kg) for Rescue
- Compliance: ANSI Z359.18-2017 Type A, OSHA 1926.502, 1910.140



DEWALT

VERTICAL ROPE LIFELINES

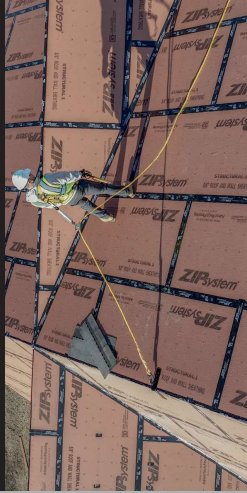

DEWALT® Vertical Rope Lifelines have a diameter of 5/8 in. (1.6 cm) with a locking snap hook on the anchor end with the other end being cut and taped.

- Comes in 25, 50, 100 ft. (7.62, 15.24, 30.5 m)
- Materials either Poly Steel or Polydac

Part Number	LENGTH	ROPE MATERIALS
DXFP100025	25 ft. (7.6 m)	Polysteel
DXFP100050	50 ft. (15.2 m)	Polysteel
DXFP100100	100 ft. (30.5 m)	Polysteel
DXFP101025	25 ft. (7.6 m)	Polydac
DXFP101050	50 ft. (15.2 m)	Polydac
DXFP101100	100 ft. (30.5 m)	Polydac

VERTICAL LIFELINE WITH ROPE ADJUSTER

DXFP210050

The DEWALT 50 ft. (15 m) Vertical Lifeline with Rope Adjuster is designed as a key component for roof top safety. The rope is water and abrasion resistant for strength and durability, while the built in rope adjuster provides the versatility of free movement or fixing in place for all restraint.

- Worker capacity range: 130-310 lbs. (58-140 kg)
- Min. Breaking Strength: 5000 lbs. (2267 kg)
- Materials: Poly steel rope, alloy steel, polyester
- Meets ANSI Z359.1-2007, OSHA 1910.66, OSHA 1926.502



SELF TRACKING REMOVABLE ROPE GRAB WITH ENERGY ABSORBING LANYARD (1.5 ft. / 0.4 m)

DXFP150010

The DEWALT Self tracking removable rope grab with energy absorbing lanyard moves along the lifeline with the user either up or down. It is removable and has a unique anti-panic feature and a factory attached energy absorber with steel snap hook.

- Capacity: 310 lbs. (140 kg)
- Min. Breaking Strength: 3372 lbs. (15 kN)
- Min. Breaking Strength: Energy absorbing lanyard 6000 lbs. (26 kN)
- Materials: webbing 1.75 in. (4.4 cm) wide high tenacity polyester, alloy steel
- Meets ANSI Z359.1-2014, OSHA 1910.66, OSHA 1926.502



SELF TRACKING REMOVABLE ROPE GRAB

DXFP150000

The DEWALT Self tracking removable rope grab moves along the lifeline with the user either up or down. It is removable and has a unique anti-panic feature.

- Capacity: 310 lbs. (140 kg)
- Min. Breaking Strength: 3372 lbs. (15 kN)
- Materials: Galvanized alloy steel with golden yellow/silver passivation
- Meets ANSI Z359.15-2014, OSHA 1910.66, OSHA 1926.502



REMOVABLE CAPTIVE ROPE GRAB WITH ENERGY-ABSORBING LANYARD (3 ft. / 0.9m)

DXFP150020

The DEWALT Self tracking removable rope grab with energy absorbing lanyard moves along the lifeline with the user either up or down. It is removable and has a unique anti-panic feature and a factory attached energy absorber with steel snap hook.

- Capacity: 310 lbs. (140 kg)
- Min. Breaking Strength: 3372 lbs. (15 kN)
- Min. Breaking Strength: Energy absorbing lanyard 6000 lbs. (26 kN)
- Materials: webbing 1.75 in. (4.4 cm) wide high tenacity polyester, alloy steel
- Meets ANSI Z359.15-2014, OSHA 1910.66, OSHA 1926.502



DEWALT

TEMPORARY HORIZONTAL LIFELINE

DEWALT® Temporary Horizontal Lifelines are lightweight, easy to install and adjustable between 15 ft. (4.6 m) and 100 ft. (30.5 m). Made of 5/8 in. (1.6 cm) kernmantle rope, it includes installation carabiner at each end, tension indicator, two(2) anchor straps. Meets OSHA 1910.140, OSHA 1926.502



DXFP160040


Part Number	Description
DXFP160020	Temporary Horizontal Lifeline System - 2 Person - 100 ft. (30.5 m)
DXFP160040	Temporary Horizontal Lifeline System - 4 Person - 100 ft. (30.5 m)

GUARANTEED TOUGH.

DEWALT

RETRACTABLE HORIZONTAL LIFELINE

DEWALT® DL60, Retractable Horizontal Lifeline with adjustable span length up to 60 ft. (18.2 m), is a self-contained, retractable, temporary horizontal lifeline system that is quick and easy to setup and tear down. OSHA 1910.140, OSHA 1926.502

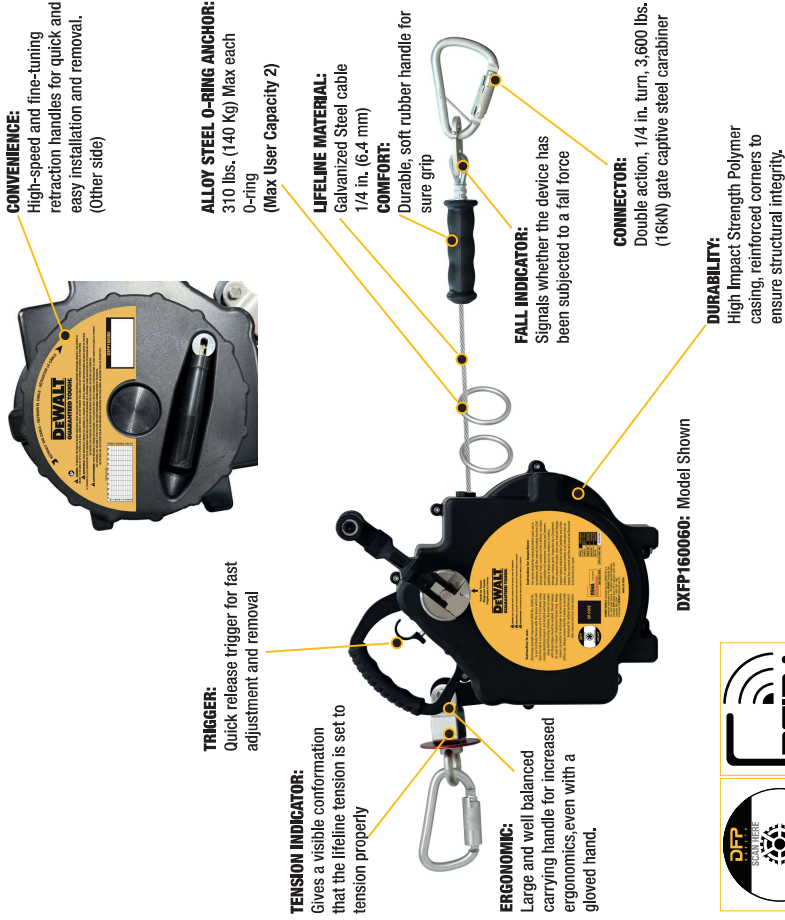

EASY DOCUMENTATION:

The DEWALT DL60 Horizontal Lifeline come with an RFID tag for quick scanning and tracking in the DFP Safety Vault system™



DEWALT

I-BEAM STANCHION ANCHOR

The DEWALT® I-BEAM STANCHION ANCHOR: A portable and extremely easy to install Anchor Post for Horizontal Lifeline on Steel construction I-Beams having flange width of 5.9 in. (15 cm) to 8.66 in. (22 cm) ANSI Z359-18 2017 Type A OSHA 1910.140, OSHA 1926.502

DXFP160001

- Can be used as a stand-alone anchor post or to form a horizontal lifeline along the length of I-Beam
- Material: High Strength Alloy Steel
- Weight: 28.2 lbs. (13 kg)
- Minimum Breaking Strength: 3,300 lbs. / 15 kN
- Max capacity ANSI 310 lbs. (140 Kg)
- Compliance: ANSI Z359.18-2017 Type A OSHA 1926.502, 1910.140



DEWALT

ROOFTOP SAFETY KITS

THE DEWALT ROOFTOP SAFETY KIT OFFERS A COMPLETE SETUP FOR ROOFING APPLICATIONS, AVAILABLE IN TWO VERSIONS:

DXFP110050 includes a D1000 harness with 5 pts of adjustment and pass-thru leg connections.

DXFP120050 includes a D1000 harness with 5 pts of adjustment and tongue buckle leg connection. Both kits include a reusable rooftop anchor, and a 50 ft. (15.2 m) lifeline with an integrated energy absorber for full compliance and safety on the job.

It all comes in a convenient container for easy transportation and storage.

Quantity 20 - 16d Nails - 0.165-in. (12 mm) x 3.5 in. (90 mm) (included)

Quantity 12 - #12 2 1/4 in. (60 mm) Hex Head Screws (included)



DXFP110050

DXFP120050

GUARANTEED TOUGH.

DEWALT

FALL PROTECTION SAFETY KITS

THE DEWALT FALL PROTECTION KIT PROVIDES THE WORKER WITH A READY SYSTEM FOR ATTACHING TO AN APPROVED ANCHOR POINT.

DXFP110001 includes a D1000 harness with 5 pts of adjustment and pass-thru leg connections.

Comes in a convenient, reusable bucket for easy transportation and storage

DXFP120001 includes a D1000 harness with 5 pts of adjustment and tongue buckle leg connection.

Comes in a convenient, reusable bucket for easy transportation and storage

DXFP110101 includes a D1000 harness with 5 pts of adjustment and tongue buckle leg connections, and a 3 ft. (0.9 m) Web Anchor Strap-Choker with D-Ring on each end.

Comes in a durable, zippered gear bag with rigid bottom and carrying handle for easy transportation and storage.

All kits include a 6 ft. (1.8 m) energy absorbing lanyard, all to help ensure working safely at height.



DXFP110101



DXFP120001



DEWALT

DROP PREVENTION PRODUCTS



Whether you're up on a roof, building a skyscraper or on a scaffolding or a ladder, you need to have confidence in your safety equipment to keep you and others safe and sound.

DEWALT® Drop Prevention products are easy to use and are built for the toughest work environments so you know you can concentrate on the job.

THE NEED FOR DROP PREVENTION SAFETY PRODUCTS

FALLING OBJECTS DATA

Industry data shows that dropped objects are a major cause of property damage, workplace injuries and even fatalities. Understanding the need to implement a drop prevention program helps to mitigate all these hazards and ensure a safer working environment.

A WARNING: Cancer and reproductive harm. -www.P65warning.ca.gov

6 ft. (1.8 m) HEIGHT
3 lbs. (1.36 kg) WRENCH



178 lbs. (8.3 kJ)
IMPACT FORCE

THERE IS NO SAFE HEIGHT
FROM WHICH TO DROP A TOOL



15 ft. (4.5 m) DEFLECTION

*Based on data from OSHA

DEWALT

DROP PREVENTION THE COMPLETE SYSTEM




Drop Prevention System - In order to protect workers from injury and equipment from damage it is essential to select all components of a drop prevention system to securely attach tools and prevent accidental drops. The three main components of a system are attachment points, connectors such as tool lanyards, and anchorage points.



Tool attachment points - Attachment points are a secure point on the tool that must be rated for at least the total weight of the tool. The user must select an attachment point that is appropriate for the tool and then secure it per the attachment instructions. Once the attachment point is in place the tool is considered **Lanyard Ready**® and the connector or lanyard can be attached.



Connectors - All tools are required to be tethered or connected to an anchorage so that so that they remain attached and protected from a fall in the event of a drop. Selecting the appropriate connector or tool lanyard based upon each tool's weight and configuration is essential to drop prevention.

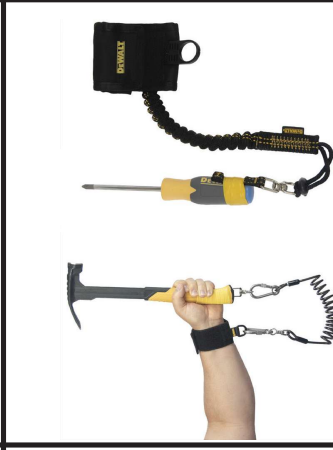

Anchorage - The final component of the system is anchorages and holders. The key variable in selecting the appropriate anchorage is the weight. Tools weighing 5 lbs. (2.3 kg) or less may be attached to the body. This can be done by securing the connector end to anchors like a tool holder, wristband or a secure point on the user's tool belt or harness. For all tools greater than 5 lbs. (2.3 kg) the user must secure the connector end to an anchorage point rated for at least the weight of the tool.

V-RING TOOL ATTACHMENTS

- Used to create a secure attachment point on most tools without a lanyard hole.
- Cinch design allows user to quickly secure equipment.
- Secure in place using our tool tape.
- Coated alloy steel V-Ring attachment point
- Meets ANSI/ISEA 121-2018 Standard

Part Number	RELAXED LENGTH	MAX WEIGHT CAPACITY	WINGS
DXDP710200	12.5 in. (31 cm)	38 lbs. (15.2 kg)	None
DXDP710201	12.5 in. (31 cm)	38 lbs. (15.2 kg)	Single
DXDP710221	12.5 in. (31 cm)	38 lbs. (15.2 kg)	Double
DXDP710222	21.8 in. (54 cm)	80 lbs. (36.2 kg)	Double



ELASTIC TOOL ATTACHMENT

DXDP710140

- Shock absorbing design to gradually slow dropped tool
- Elastic Cord Cinch with adjustable barrel lock for tool attachment
- Coated steel alloy D-ring with swivel connection, for secure attachment
- Relaxed length 11 in. (27 cm); extended length 15 in. (38 cm)
- Max working capacity 15 lbs. (6.8 kg)
- Meets ANSI/ISEA 121-2018 Standard
- Comes in a pack of 3



WIRE TOOL ATTACHMENT

DXDP710700

- Corrosion resistant to maximize longevity
- PU coating over cable wire for protection and durability
- Screws easily connect to create a one-step attachment point
- Designed to safely tether small tools through captive tool hole
- Max capacity of 2 lbs. (0.9 kg)
- Full length 6 in. (15 cm)
- Meets ANSI/ISEA 121-2018 Standard
- Comes in a pack of 6



TOOL ATTACHMENTS WITH SWIVELING D-RING

- Used to create a secure attachment point on most tools without a lanyard hole.
- Secure in place using our tool tape
- High strength polyester webbing
- Steel alloy D-Ring with swivel connection
- Meets ANSI/ISEA 121-2018 Standard



Part Number	RELAXED LENGTH	MAX WEIGHT CAPACITY	QUANTITY PER PACK
DXDP710411	2.5 in. (6 cm)	3 lbs. (1.3 kg)	6
DXDP710422	4.5 in. (11 cm)	3 lbs. (1.3 kg)	6
DXDP710433	5.5 in. (14 cm)	3 lbs. (1.3 kg)	6
DXDP710444	6.5 in. (16.5 cm)	3 lbs. (1.3 kg)	3
DXDP710455	8.5 in. (21.5 cm)	3 lbs. (1.3 kg)	3
DXDP407161	Assorted 7 each	3 lbs. (1.3 kg)	5

CINCH LOOP ATTACHMENT

DXDP710600

- Designed to safely tether small tools through captive tool hole
- Durable and reusable polyester cord
- Coated alloy steel D-ring for secure attachment
- Length is 6.6 in. (16 cm)
- Max working capacity 5 lbs. (2.3 kg)
- Meets ANSI/ISEA 121-2018 Standard
- Comes in a pack of 3



TOOL TAPE

DXDP810100

- Used to for V-Ring and D-Ring attachment points for tethering a variety of tools.
- No heat required for application
- Self-Adhering means no adhesives required
- Roll contains 12 ft. (3.6 m) allowing for attachments on multiple tools
- Meets ANSI/ISEA 121-2018 Standard
- Comes in pack of 1



HARD HAT LANYARD

DXDP610400

- High-stretch elastic polyester material
- Double lock buckle attaches to harness or vest
- Tethering loop to connect to slots on hard hat
- Relaxed length 16 in. (40 cm); extended length 34 in. (86 cm)
- Maximum safe working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard
- DXDP910400: Comes in a pack of 10



WRISTBAND TOOL LANYARD

DXDP610310

- Durable polyester webbing secures to wrist
- Built-in tool lanyard provides quick connection with tool attachment points
- Elastic webbing helps reduce the forces on the wrist in the event of a drop
- Wrist Measurement: S/M 5 in. (12 cm) – 7 in. (17 cm); extended length 13.75 in. (35 cm)
- Maximum safe working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



COILED TOOL LANYARD

DXDP710900

- PU coated steel cable for corrosion resistance and durability
- Stainless steel carabiners for quick connection
- Swiveling design prevents tangles and fast recoil
- Coiled length 4 in. (10 cm); extended length 60 in. (152 cm)
- Max working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



SINGLE LEG TOOL LANYARD (HEAVY DUTY)

DXDP720510

- Durable polyester blended webbing
- Choker style tool end attachment
- Swiveling aluminum alloy carabiner with captive eye
- Relaxed length 70 in. (177 cm)
- Max working capacity 80 lbs. (36.2 kg)
- Meets ANSI/ISEA 121-2018 Standard



CLIP TO LOOP SPRING LANYARD

DXDP711100

- Lightweight polyurethane cable for tethering lightweight tools and objects such as mobile phones (Sticky pad included)
- Coiled length 12 in. (30 cm); extended length 36 in. (91 cm)
- Max working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard
- Comes in a pack of 3



DEWALT

ELASTIC TOOL LANYARDS

- Durable polyester blended webbing
- Anodized aluminum alloy carabiner with captive eye
- Barrel-Lock carabiner on one end.
- Cinch loop or choker tool attachment
- Meets ANSI/ISEA 121-2018 Standards



DXDP720200

Part Number	RELAXED LENGTH	EXTENDED LENGTH	MAX WEIGHT CAPACITY	LANYARD LEG
DXDP720200	32 in. (81 cm)	51 in. (129 cm)	15 lbs. (6.8 kg)	Single
DXDP720220	32 in. (81 cm)*	51 in. (129 cm)*	15 lbs. (6.8 kg)	Twin
DXDP720300	24.4 in. (60 cm)	43 in. (109 cm)	25 lbs. (11.3 kg)	Single
DXDP720310	24.4 in. (60 cm)*	43 in. (109 cm)*	25 lbs. (11.3 kg)	Twin
DXDP720500	39 in. (99 cm)	67 in. (170 cm)	35 lbs. (15.8 kg)	Single

DXDP720300

DXDP720220

(Per leg)*

DEWALT

QUICK CONNECT TOOL LANYARDS SYSTEM

- Durable polyester blended webbing
- Anodized aluminum alloy carabiner with captive eye
- Barrel-Lock carabiner with elastic tool lanyard and cinch cord for tool attachment
- Modular connection for quick exchange of tools
- Relaxed length 37 in. (93 cm); Extended length 51 in. (129 cm)
- Max working capacity 5 lbs. (2.3 kg)
- Meets ANSI/ISEA 121-2018 Standards



DXDP710501

DXDP710211


DXDP710500

Part Number	DESCRIPTION
DXDP710501	Quick connect elastic tool lanyard with cinch cord tool attachment
DXDP710211	Quick connect Cinch cord tool attachment
DXDP710500	Quick connect elastic tool lanyard

DEWALT

POWER TOOL LANYARDS

The DEWALT Power Tool Lanyards are designed to be used with tools that have a secure, **Lanyard Ready™** attachment point in place. The lanyards are made with polyester webbing and aluminum components to provide durability and longevity even in the toughest work environments. Dual anodized aluminum carabiners with captive eye & swivel both end, along with the elastic design combine to provide freedom of movement and tangle free operation during use. All of our lanyards are tested and meet ANSI/ISEA 121-2018 Standard.

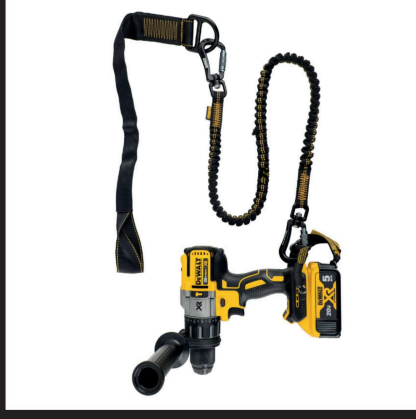

Part Number	RELAXED LENGTH	EXTENDED LENGTH	MAX WEIGHT CAPACITY
DXDP721500	24 in. (61 cm)	38 in. (98 cm)	15 lbs. (6.8 kg)
DXDP721501	24 in. (61 cm)	38 in. (98 cm)	25 lbs. (11.3 kg)
DXDP721510	41 in. (104 cm)	75 in. (190 cm)	15 lbs. (6.8 kg)
DXDP721511	41 in. (104 cm)	75 in. (190 cm)	25 lbs. (11.3 kg)



ANCHOR STRAPS

DXDP813002 (50 lbs. / 22.6 kg)
DXDP813012 (80 lbs. / 36.3 kg)

- Abrasion resistant sleeve for extended life
- The D-ring provides capacity for multiple tools depending on weight.
- Choker style provides easy connection to beams and rails.
- Length 24 in. (60 cm)
- Max capacity 50 lbs. (22.6 kg) or 80 lbs. (36.3 kg)
- Meets ANSI/ISEA 121-2018 Standard



WRISTBAND TOOL ANCHOR

DXDP610300

- Durable polyester material for extended life
- Pull-on design is easy to take on and off
- Adjusts to any wrist size - One size fits all
- Coated alloy steel D-ring attachment point for tethering lightweight hand tools
- Maximum safe working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



TAPE MEASURE HOLDER

DXDP610200

- Hook and loop straps secure tape measure inside holder for safe and easy tethering
- Accommodates tape measures up to 35 ft. (10.5 m)
- Rugged polyester nylon body
- Coated alloy steel D-Ring for connecting to tool lanyards
- Allows for Steel belt clip securely attaches to a tool belt
- Maximum safe working capacity of 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



RADIO-MOBILE PHONE HOLDER KIT

DXDP610100 (no lanyard)

DXDP910600 (lanyard included)

- Rugged polyester body stretches to fit most mobile phones
- Heavy-duty elastic hook & loop straps provides for greater protection
- Coated alloy steel D-Ring on back for connecting to tool lanyards
- DXDP910600 Holder includes lanyard and phone connector for a complete drop prevention system
- Max working capacity 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



NO SPILL PARTS POUCH

DXDP110001

- Unique enclosure designed to prevent contents from spilling, even when turned upside down.
- 3 loops for belt attachment
- Ventilation eyelet for air flow and to allow moisture to escape
- Microfiber material cushioned from inside
- Length: 11 in. (28 cm)
- Width: 8 in. (20 cm)
- Maximum safe working capacity of 30 lbs. (13 kg)
- Meets ANSI/ISEA 121-2018 Standard



QUICK CONNECT TOOL TETHERING KIT

DXDP910100

Tether up to four 5 lbs. (2.3 kg) tools

Kit Includes:

- Detachable Lops 3-Pack, with modular quick snap buckle
- Self-Adhering Tool Tape - 12 ft. (3.7 m) Roll, requires no heat to apply
- Detachable Single Carabiner Tool Lanyard - 5 lbs. (2.3 kg) max capacity, with modular connecting and anodized aluminum carabiner
- Durable polyester blended webbing, having a relaxed length 37 in. (93 cm); extended length 51 in. (129 cm)
- Meets ANSI/ISEA 121-2018 Standard



COILED TAPE MEASURING KIT

DXDP910200

For secure attachment of tape measures

Kit Includes

- Tape measure boot with hook and loop straps secure tape measure inside holder for safe and easy tethering
- Coated Steel alloy D-Ring for connecting to tool lanyards
- Coiled tool tether with coated Stainless-Steel carabiners for quick connection
- Accommodates tape measures up to 35 ft. (10.5 m)
- Swiveling design prevents tangles and fast recoil
- Coiled length 4 in. (10 cm); extended length 60 in. (152 cm)
- Max working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



COILED TOOL TETHERING KIT

DXDP910150

Tether up to four 2 lbs. (0.9 kg) tools

Kit Includes

- Three 2.5 in. (6 cm) high strength Polyester tool attachments with coated steel alloy Swivel D-Ring for secure attachment with 3 lbs. (1.3 kg) max capacity
- Self-Adhering Tool Tape - 12 ft. (3.7 m) Roll, requires no heat to apply
- Coiled tool lanyard with coated stainless-steel carabiners for quick connection
- Swiveling design prevents tangles and fast recoil
- Coiled length 4 in. (10 cm); extended length 60 in. (152 cm)
- Max working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard



QUICK CONNECT TAPE MEASURING KIT

DXDP910300

For secure attachment of tape measures

Kit Includes

- Tape measure boot with hook and loop straps secure tape measure inside holder for safe and easy tethering
- Coated steel alloy D-Ring for connecting to tool lanyards
- Detachable single carabiner Tool Lanyard - 5 lbs. (2.3 kg) max capacity, with modular connecting buckle and anodized aluminum carabiner
- Durable polyester blended webbing, having a relaxed length 37 in. (93 cm); extended length 51 in. (129 cm)
- Max working capacity: 2 lbs. (0.9 kg)
- Meets ANSI/ISEA 121-2018 Standard





Manufactured and Distributed by:

Trademark Licensee: DFP Safety Corp. 20711 Holt Av. Suite 1525 Lakeville, MN 55044

1-800- 391-1862

A licensee of DEWALT Industrial Tool Co.

www.DFPSAFETY.com

P/N: DL301001, Rev: D, Date: 2025.09.15

© 2025 DEWALT. DEWALT® is a registered trademark of the DEWALT Industrial Tool Co., used under license. All rights reserved. The yellow and black color scheme is a trademark for DEWALT Power Tools and Accessories.

All rights reserved. Neither this catalogue nor its text, illustrations, drawings or any part thereof, may be reproduced, stored in a retrieval system, photocopied, recorded or transmitted in any form, whether electronic or otherwise, without our consent. To the best of our knowledge, all descriptions and illustrations contained in, this catalogue are correct at the time of going to print. We cannot, however, be held liable for any inaccuracies of description or illustration and reserve the right to change specifications without notification. © DEWALT® 2025

Specifications as mentioned in the catalog are not binding, and can be changed without notice of the producer.